


U09RD	KIT RISCALDATORE GASOLIO FLOW 5D-12V
U10RD	KIT RISCALDATORE GASOLIO FLOW 5D-24V



Flow 5D/5B			
Technical characteristics	Petrol - EN228	Diesel - EN590	Diesel - EN590
Voltage	12V	12V	24V
Heating medium	Coolant, antifreeze coolant		
Optimal liquid/coolant volume	10 - 12 L		
Coolant liquid flow rate at 0 bar pressure in system	1200 l/h		
Coolant liquid flow rate at 0.18 bar pressure in system	800 l/h		
Heating power	5 kW		
Power consumption	42 W		
Power consumption, in start	122 W (12V) / 120 W (24V)		
Max. work altitude (MASL)	1000 m		
Fuel consumption	0.70 l/h max	0.62 l/h max	0.62 l/h max
Coolant inlet / outlet diameter	OD - Ø 18 mm		
Control mode	Manual, standard remote control, modem		
Compatible control panels	PU-20, PU-27, Comfort Control		
Weight of the heater	2.4 kg		
Weight of the set	8 kg		
Heater dimensions	220x90x136 mm		
Package dimensions	55x39x15 cm		

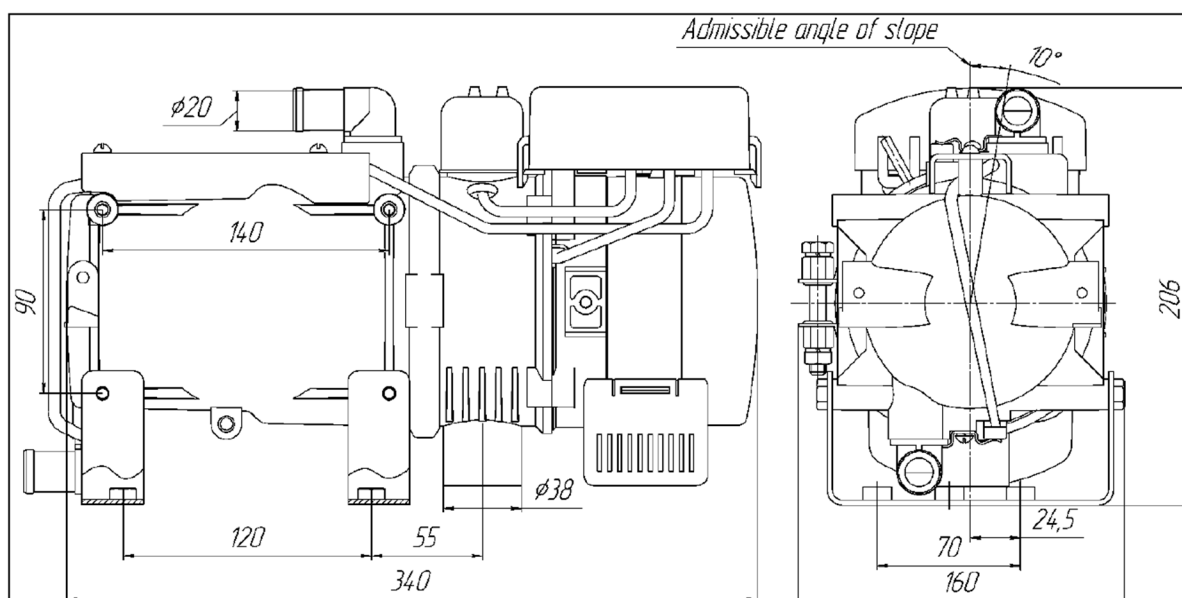