


LANCASTER HVAC TOP

Presentazione Gruppo HVAC cabina O&M


Presentation of the O&M cabin HVAC group

HVAC LANCASTER TOP

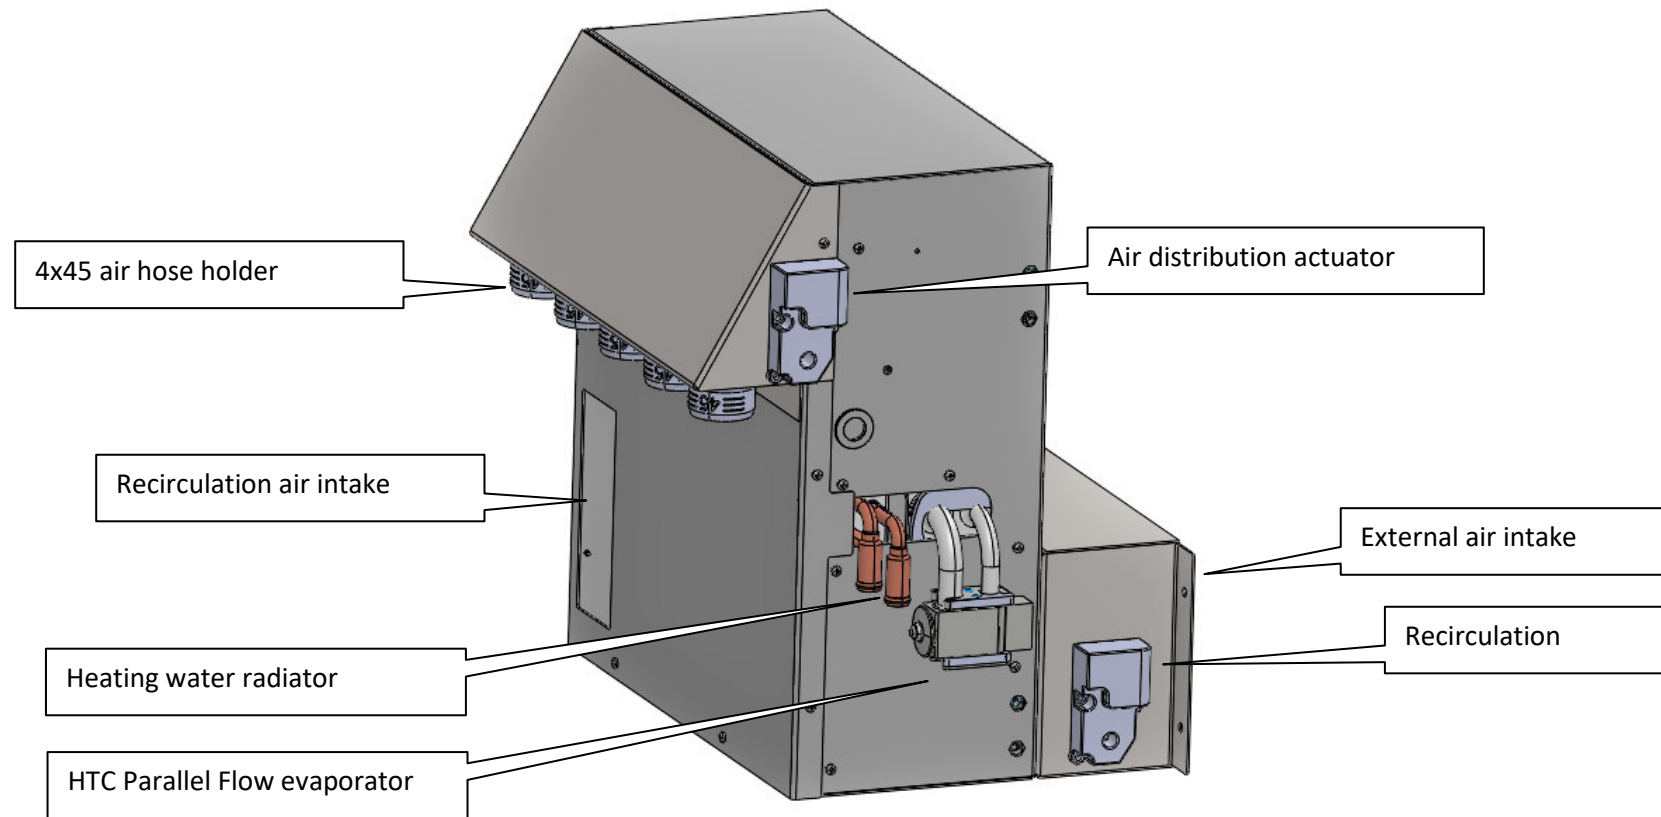


HVAC LANCASTER TOP


On request it is possible to customize the water and gas pipes outlet via wall pass, dedicated electrical wiring with quick connector.

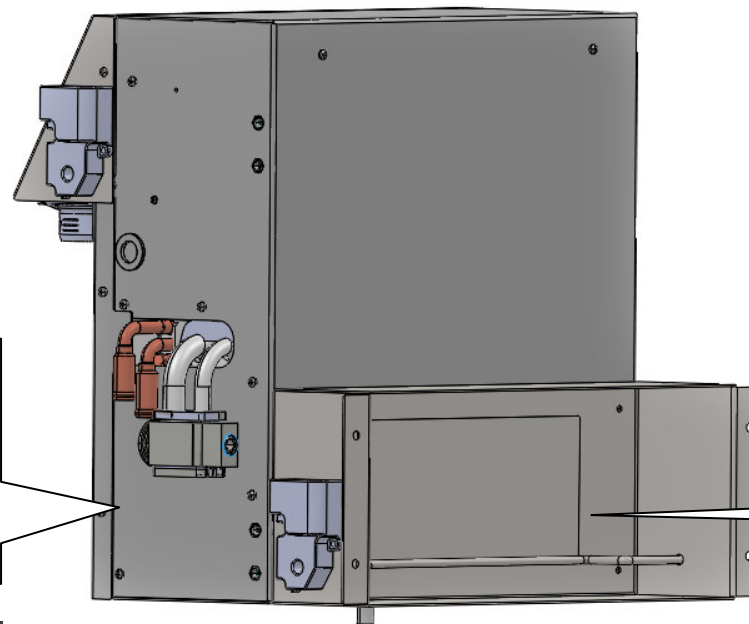



Open-close external-internal flap

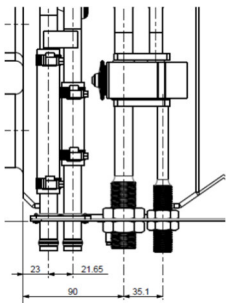

LANCASTER TOP HVAC Assembly

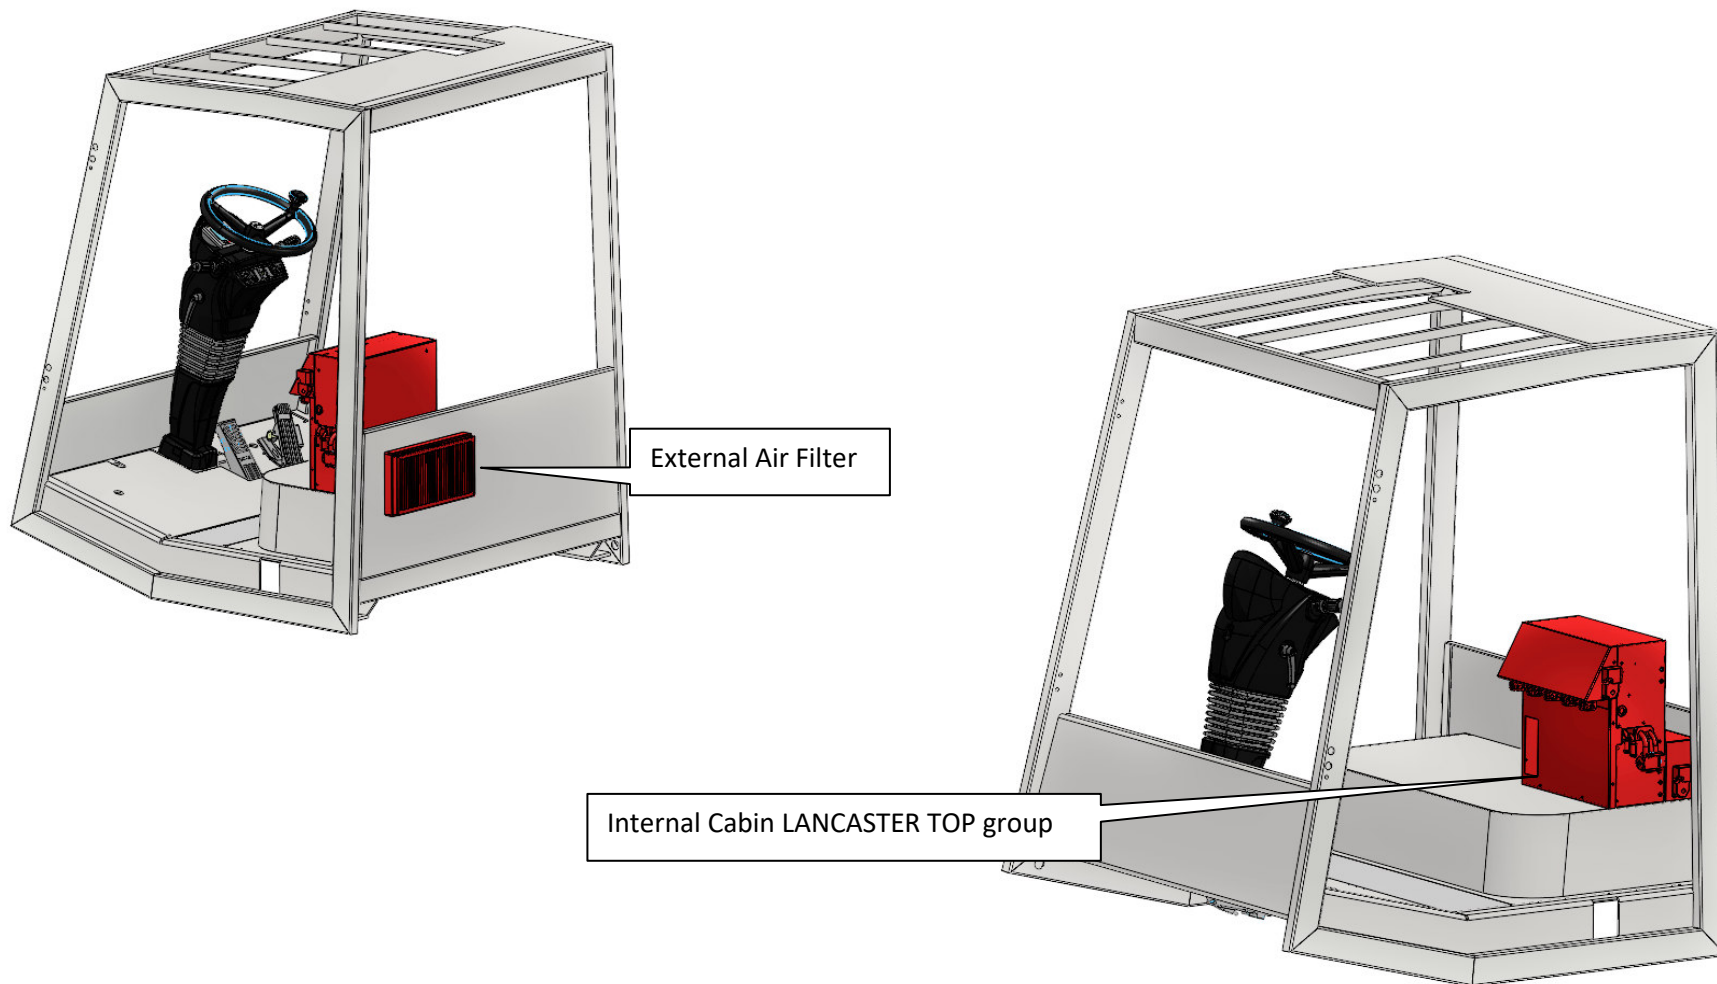

Dimension HVAC LANCASTER TOP

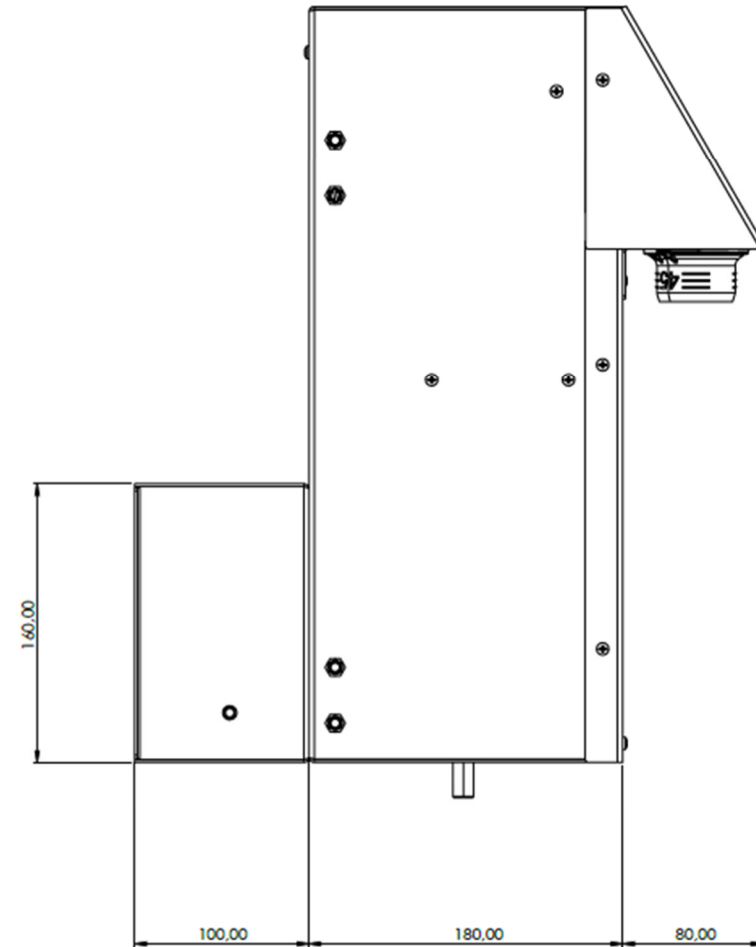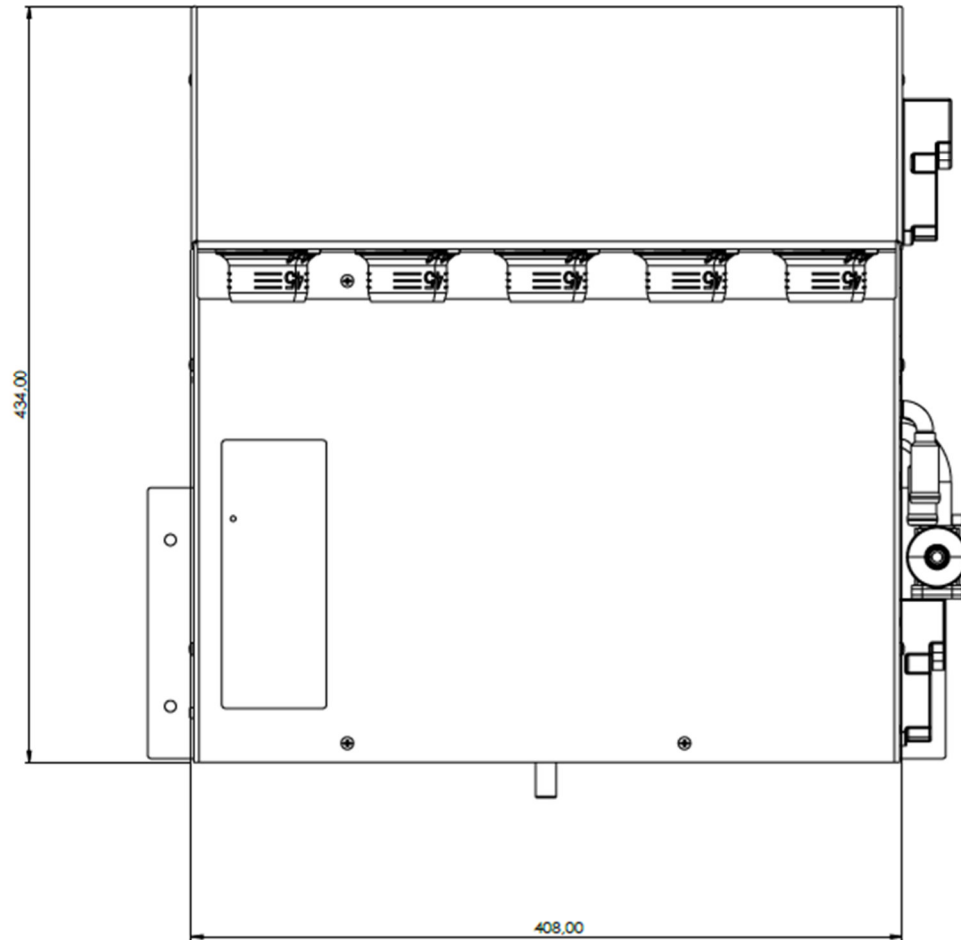

Dati Tecnici – Technical data:

Codice Componente – Component Code	Gruppo HVAC dedicato per O&M - Dedicated HVAC group for O&M
Potenza in riscaldamento @ -10° Heating Power @-10°	8 Kw @ -10°
Potenza in raffreddamento @+40° Cooling Power @+40°	9 Kw @ +40°
Portata Aria (bocca libera) AirFlow (free mouth)	1080 m3/h
Assorbimento Elettrico ventilatore Fan Power consumption	@ 12V=25Ah - @24V=12,5Ah
Velocità ventilatore Ventilation Speed	3
Peso - weight	16 Kg



Via A. Gramsci, 20/A – 40062 Molinella (BO)

Tel : +39.051.88.12.27 Mobile: +39.333.994.25.81

www.masicondioners.com e-mail info@masicondioners.com